

Conference Room Designer



STU


Design Company: Proeling
Design Engineer: Cvecko
Date Generated: Wed Sep 10 2025 15:28:28 GMT+0200
Design Location: [Click Here](#)

Room 1

ROOM DETAILS

Room Dimensions: 15 m x 6 m x 2.8 m
Table Shape: Ushape
Table Dimensions: 13 m x 3 m
Acoustics: [Good](#)
Mic Style: Ceiling
Mic Coverage: Focused
Speaker Coverage: Focused

MICROPHONE COVERAGE

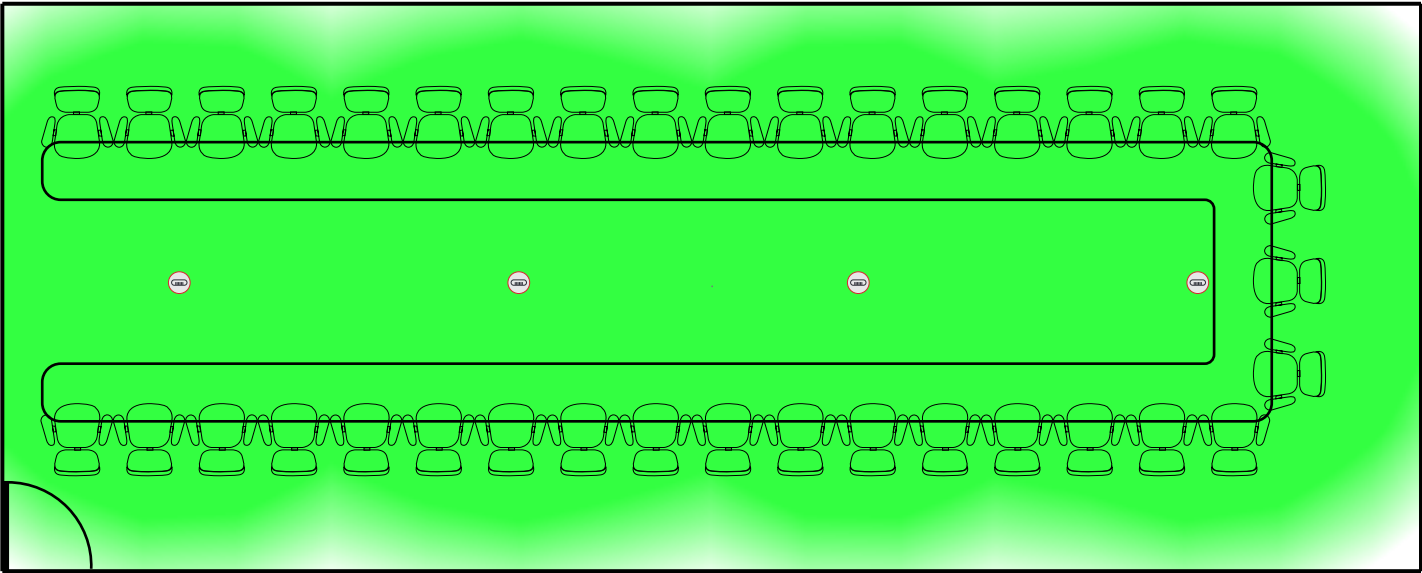


Distance from nearest mic: 1 2 3 4 5 Meters

MICROPHONE POSITIONING DETAIL

#	MODEL	HORIZONTAL DIST (X)	VERTICAL DIST (Y)
1	Parlé TCM-X	1.9 m	2.9 m
2	Parlé TCM-X	5.5 m	2.9 m
3	Parlé TCM-X	9 m	2.9 m
4	Parlé TCM-X	12.6 m	2.9 m

Notes:
Horizontal and Vertical distances are referenced from top-left corner or diagram
Height is measured from floor

SPEAKER COVERAGE

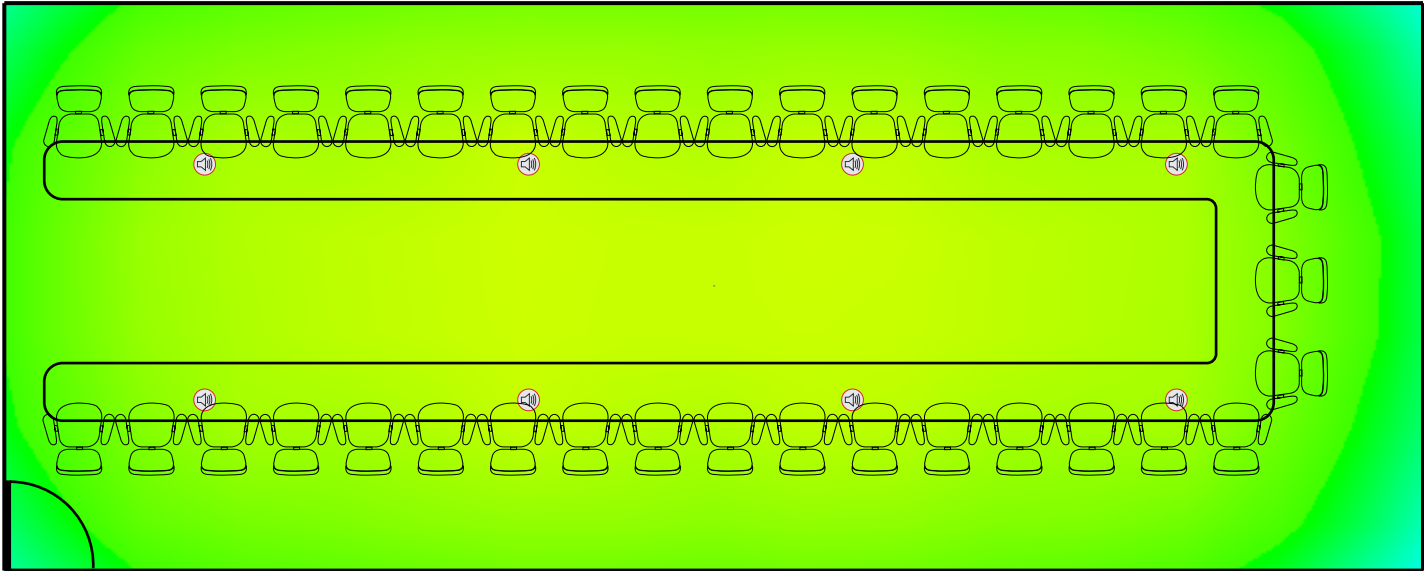


Relative Average Level: -10 -8 -6 -4 -2 0 2 4 dB

SPEAKER POSITIONING DETAIL

#	MODEL	HORIZONTAL DIST (X)	VERTICAL DIST (Y)
1	Desono C-IC6	2.1 m	1.7 m
2	Desono C-IC6	5.5 m	1.7 m
3	Desono C-IC6	9 m	1.7 m
4	Desono C-IC6	12.4 m	1.7 m
5	Desono C-IC6	2.1 m	4.2 m
6	Desono C-IC6	5.5 m	4.2 m
7	Desono C-IC6	9 m	4.2 m
8	Desono C-IC6	12.4 m	4.2 m

Notes:
Horizontal and Vertical distances are referenced from top-left corner or diagram

CAMERA COVERAGE

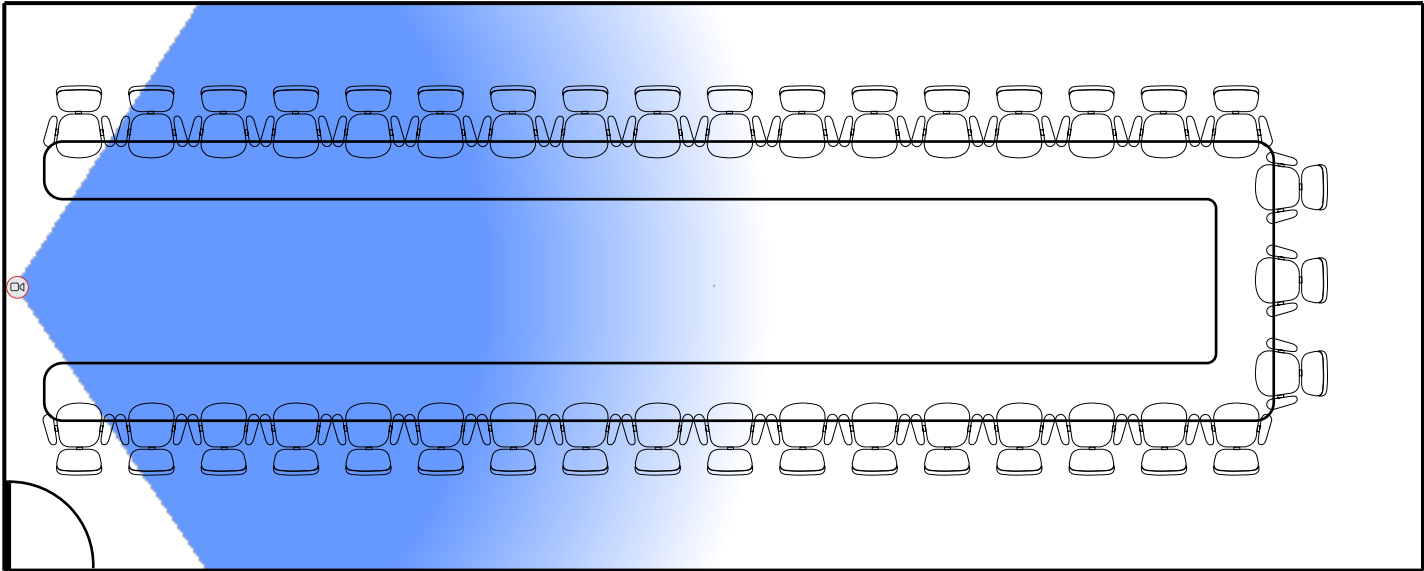

Distance from camera: 1 2 3 4 5 6 7 8 Meters

CAMERA POSITIONING DETAIL

#	MODEL	HORIZONTAL DIST (X)	VERTICAL DIST (Y)	HORIZONTAL ANGLE
1	Vidi 250	0 m	3 m	360 deg

Notes:
Horizontal and Vertical distances are referenced from top-left corner or diagram
Horizontal angle is clockwise with 0 deg reference pointing right

EQUIPMENT LIST

QTY	PRODUCT	DESCRIPTION
1	TesiraFORTÉ X 400	Meeting Room DSP with 4 channels of AEC.
2	Parlé TCM-XA	AVB Beamtracking, surface-mount ceiling microphone with PoE+ amplifier.
2	Parlé TCM-XEX	Expansion AVB Beamtracking, surface-mount ceiling microphone.
8	Desono C-IC6 (units)	In-ceiling, indoor, 6.5-inch, coaxial loudspeaker (priced individually, sold in pairs).
1	Vidi 250	Wide angle 4K conferencing camera
11	EasyConnect C5E-10-P	10-foot (3-meter) plenum rated CAT5e cable
2	EasyConnect C5E-25-P	25-foot (7.6-meter) plenum rated CAT5e cable
2	BPAK	Backpack adapter kit